

Opal cubicle, without feet

Reference: solid grade laminate in 10 or 13 mm





Adapted to the humid atmosphere

Solid grade

13 mm.

No visible fastenings




The opal cubicle is hanging up thanks to a frieze which is unbending and stable. These qualities reflect an easy-care solution: the working time is reduced and the hygienic conditions are improved.

These cubicle are available in 10 or 13 mm and do not own any visible fastening.

Standard dimension

- > No feet
- > If superior to 4,80m need to put an adjustable feet.

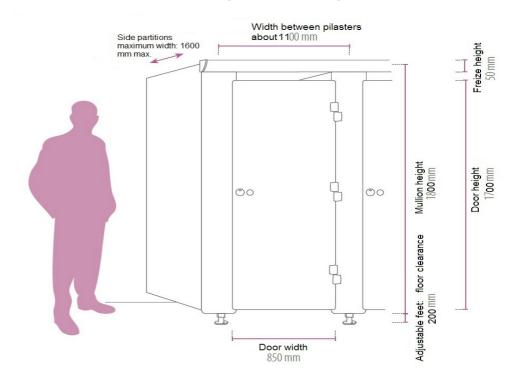


1/2

Societe Suffixe ■ 6, rue Benjamin Franklin – Bp 10 – 70190 Rioz ■ Phone. 03 84 91 24 70 ■ Fax. 03 84 91 24 51 ■ www.suffixe.fr



Solid grade laminate color chart :

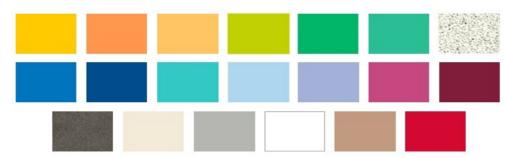

Technical description of the opal cubicle:

Parts	Pictures	Features
Doors, pilasters and side partitions		Manufactured in grade laminate (10 or 13 mm), soft completion. Adjusted to the humid atmosphere. M2 fire classification (M1 can be added in option)
Doors, pilasters		Doors are covering pilasters once installed. Rounded edges. Pilasters are curved in the inferior part. No big corner.
Side partitions	7	Freestanding side partitions using one panel. Maximum depth: 2,05 m for standard cubicles and 1.85 m for comfort cubicles. Beveled edges
Frieze	厅厅	In aluminum, gray varnished
Brackets and angled brackets	\oplus	Hardware fittings (3 U brackets and 4 angled brackets) gray lacquered stainless steel.
Adjustable feet		Adjustable feet. Aluminum tube (gray) 50 \times 50 mm. Set up on nylon adjustable feet; reinforced by fiberglass
Pivoting bolt	•	In nylon, color: gray. Resistant to the corrosion. Free/busy knob. The screws are hidden. Other bolt in option.
Door knob	0	In nylon, color: gray, 1 single knob per door.
Fastenings	0	Build in stainless steel, with an anti-breaking in system.
Split hinge	\$	Build in nylon, reinforced by fiberglass. Color:gray. Brass axle. The screws are hidden. With or without spring back system. Can be open to the right or to the left. Possibility to unhinge the doors. 2 split hinges per door.